


NOTE:
USE SUITABLE MATERIAL REMOVED DURING TRENCH EXCAVATION FOR
BACKFILL UNLESS DIRECTED OTHERWISE BY ENGINEER

SEE "LANDSCAPING" AND "RESTORATION OF SURFACES"
SECTIONS OF THE CONTRACT DOCUMENTS FOR SEEDING NOTES.

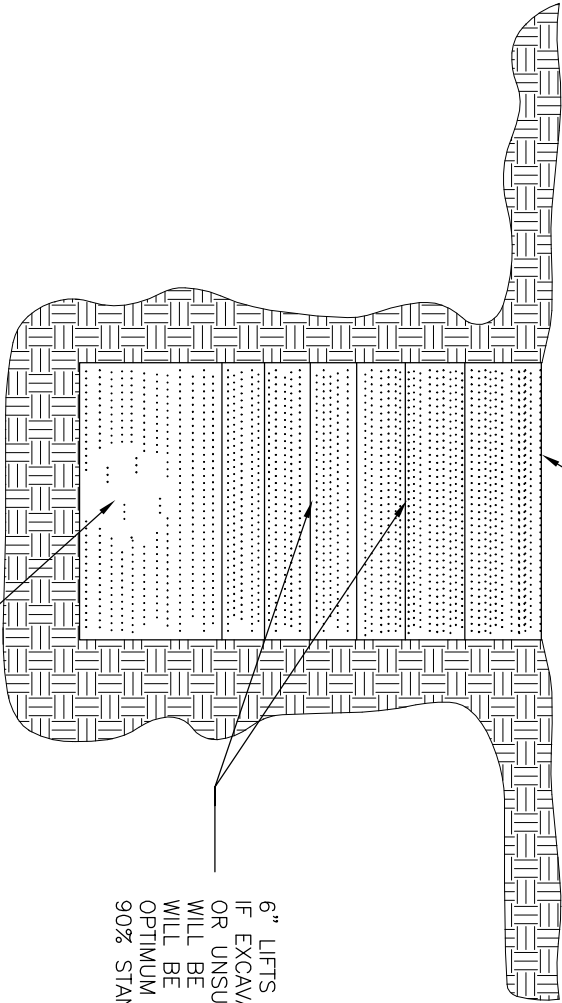

6" LIFTS OF COMPACTED SOIL.
IF EXCAVATED MATERIAL IS TOO WET
OR UNSUITABLE. A PROPER FILL MATERIAL
WILL BE SUBSTITUTED. FILL MATERIAL
WILL BE PLACED IN 6" LIFTS AT
OPTIMUM MOISTURE AND COMPACTED
90% STANDARD PROCTOR.

SEE APPROPRIATE
PIPE BEDDING DETAIL

REVISIONS

DATE DESCRIPTION

CITY OF ASHEVILLE, N.C.
ENGINEERING DEPARTMENT

SHOULDER REPAIR

STD. No.

5.07

